

Lite Surface

Key advantages

- Slim rectangular and round surface luminaire for outdoor installation on wall.
- Installation: Luminaire is supplied with plastic outer installation box for easy mounting.
- The body is protected by a special antioxidizing treatment for a higher resistance against aggressive agents. Salt spray test being applied to ensure stability of finishing.
- The heat generated by the light source is dissipated by means of a passive cooling system.
- The luminaire is equipped with a piece of cable for mains to provide easy-to-make connection.

EN

- Corrosion resistant die-cast aluminium body.
- Mains voltage: 220-240V / 50-60Hz.
- Clever thermal design with internal cooling pins.
- Led colour temperatures are optionally 2700K, 3000K, 3500K, 4000K, 5000K and 6500K.
- Internal silicon gaskets ensure IP protection.
- All external screws are stainless steel.
- Double layer polyester powder paint resistant to corrosion and salt spray fog.
- High colour consistency: <3 SDCM
- L80 B10 50000hrs and five years warranty.



Kilit Avantajları

- Slim dikdörtgen ve yuvarlak forma sahip sivaüstü duvara monte armatür serisi.
- Montaj: Kolay montaj için armatür plastik dış alçı kasaya sahiptir.
- Gövde boyası oksitlenmeye karşı özel korumalıdır. Armatürler tuz testi ile oksitlenmeye karşı koruma tip testine tabi tutulmaktadır.
- Pasif soğutucu sistemine sahiptir.
- Armatür 220V enerji girişi kablosu üzerinde verilmektedir. Enerji bağlantısı için armatürü açmaya gerek yoktur.

TR

- Korozyona dayanıklı alüminyum enjeksiyon gövde.
- 220-240V / 50-60Hz enerji girişi.
- 2700K, 3000K, 3500K, 4000K, 5000K ve 6500K renk sıcaklığı seçenekleri mevcuttur.
- Silikon contalar ile IP koruması sorunsuz sağlanır.
- Tüm dış vidalar paslanmazdır.
- Çift katmanlı polyester toz boya sayesinde korozyona ve tuza dayanıklı.
- Yüksek renk uyumu: <3 SDCM
- L80 B10 50000 saat ve beş yıl garanti.

Lite Surface

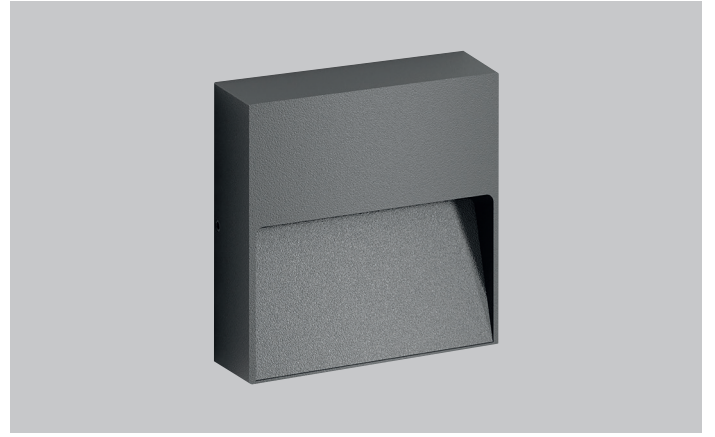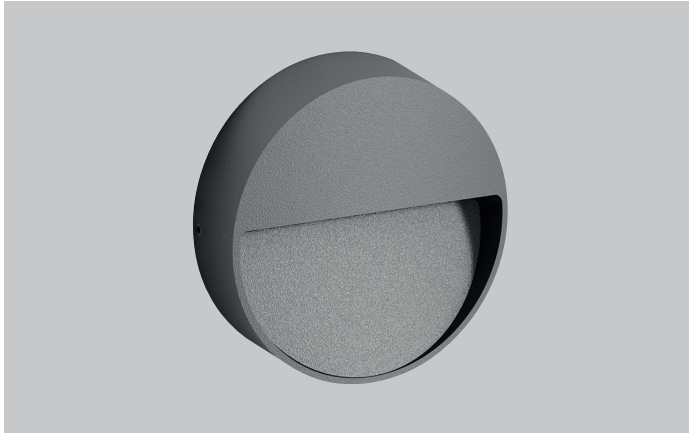

5 / Product Color / Ürün Renk



White = 01



Light Gray = 04




Textured Metallic
Dark Gray = 05



Black = 03

Lite Surface / O07.WA.00015

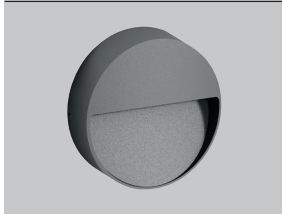

Power / Güç	CRI	Order Code / Sipariş Kodu	Kelvin	Lümen T _c =50° Lümen
4.5W	CRI>80	O07.WL.00015 . (..) . (..) . (..) . (..)	2700K	132
			3000K	135
			3500K	141
			4000K	146
			5000K	148
			6500K	152



* Code example / Kod örneği:

O07.WA.00015 . 5 . 827 . ASM . 01

1 2 3 4 5

Lite Surface / O07.WA.00016



Power / Güç	CRI	Order Code / Sipariş Kodu	Kelvin	Lümen T _c =50° Lümen
4.5W	CRI>80	O07.WL.00016 . (..) . (..) . (..) . (..)	2700K	161
			3000K	164
			3500K	171
			4000K	176
			5000K	178
			6500K	183





* Code example / Kod örneği:

O07.WA.00016 . 5 . 827 . ASM . 01

1 2 3 4 5

2	Watt / Watt		3		CRI / Kelvin		4	Reflector Angle / Reflektör Açısı		5	Product Color / Ürün Renk	
	5	4.5W - 350mA	827	CRI>80 - 2700K	ASM	Asymmetric		01	white			
			830	CRI>80 - 3000K				02	ral 9010			
			835	CRI>80 - 3500K				03	black			
			840	CRI>80 - 4000K				04	gray			
			850	CRI>80 - 5000K				05	dark gray			
			865	CRI>80 - 6500K				06	special color			

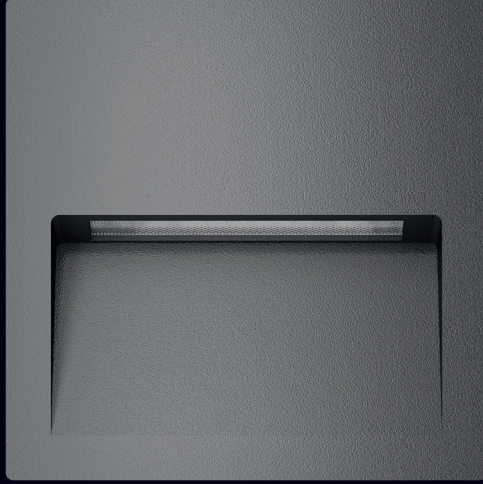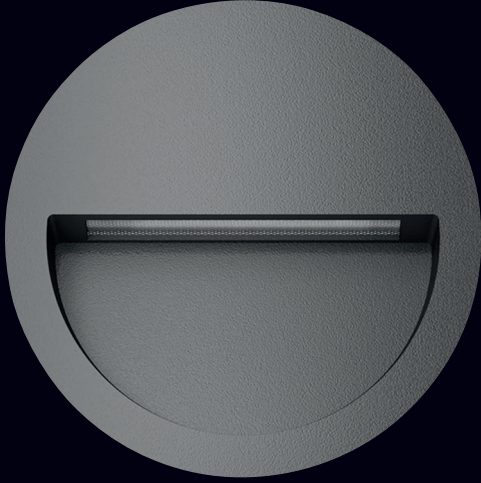

Lite Recessed

Key advantages

- Slim rectangular and round recessed luminaire for outdoor installation on wall.
- Installation: Luminaire is supplied with plastic outer installation box for easy mounting.
- The body is protected by a special antioxidizing treatment for a higher resistance against aggressive agents. Salt spray test being applied to ensure stability of finishing.
- The heat generated by the light source is dissipated by means of a passive cooling system.
- The luminaire is equipped with a piece of cable for mains to provide easy-to-make connection.

EN

- Corrosion resistant die-cast aluminium body.
- Mains voltage: 220-240V / 50-60Hz.
- Clever thermal design with internal cooling pins.
- Led colour temperatures are optionally 2700K, 3000K, 3500K, 4000K, 5000K and 6500K.
- Internal silicon gaskets ensure IP protection.
- All external screws are stainless steel.
- Double layer polyester powder paint resistant to corrosion and salt spray fog.
- High colour consistency: <3 SDCM
- L80 B10 50000hrs and five years warranty.

Kilit Avantajları

- Slim dikdörtgen ve yuvarlak forma sahip ankastre duvara monte armatür serisi.
- Montaj: Kolay montaj için armatür plastik dış alçı kasaya sahiptir.
- Gövde boyası oksitlenmeye karşı özel korumalıdır. Armatürler tuz testi ile oksitlenmeye karşı koruma tip testine tabi tutulmaktadır.
- Pasif soğutucu sistemine sahiptir.
- Armatür 220V enerji girişi kablosu üzerinde verilmektedir. Enerji bağlantısı için armatürü açmaya gerek yoktur.

TR

- Korozyona dayanıklı alüminyum enjeksiyon gövde.
- 220-240V / 50-60Hz enerji girişi.
- 2700K, 3000K, 3500K, 4000K, 5000K ve 6500K renk sıcaklığı seçenekleri mevcuttur.
- Silikon contalar ile IP koruması sorunsuz sağlanır.
- Tüm dış vidalar paslanmazdır.
- Çift katmanlı polyester toz boya sayesinde korozyona ve tuza dayanıklı.
- Yüksek renk uyumu: <3 SDCM
- L80 B10 50000 saat ve beş yıl garanti.

Lite Recessed



5 / Product Color / Ürün Renk



White = 01



Light Gray = 04




Textured Metallic
Dark Gray = 05





Black = 03

Lite Recessed / O07.WA.00020



Power / Güç	CRI	Order Code / Sipariş Kodu	Kelvin	Lümen T _c =50° Lümen
4.5W	CRI>80	O07.WL.00020 . (..) . (...) . (..) . (..)	2700K	132
			3000K	135
			3500K	141
			4000K	146
			5000K	148
			6500K	152



* Code example / Kod örneği:


O07.WA.00020 . 5 . 827 . ASM . 01

1 2 3 4 5

Lite Recessed / O07.WA.00021



Power / Güç	CRI	Order Code / Sipariş Kodu	Kelvin	Lümen T _c =50° Lümen
4.5W	CRI>80	O07.WL.00021 . (..) . (...) . (..) . (..)	2700K	161
			3000K	164
			3500K	171
			4000K	176
			5000K	178
			6500K	183



* Code example / Kod örneği:

O07.WA.00021 . 5 . 827 . ASM . 01

1 2 3 4 5

2	Watt / Watt		3	CRI / Kelvin		4	Reflector Angle / Reflektör Açısı		5	Product Color / Ürün Renk	
	5	4.5W - 350mA		827	CRI>80 - 2700K		ASM	Asymmetric		01	white
			830	CRI>80 - 3000K				02	ral 9010		
			835	CRI>80 - 3500K				03	black		
			840	CRI>80 - 4000K				04	gray		
			850	CRI>80 - 5000K				05	dark gray		
			865	CRI>80 - 6500K				06	special color		