


STERIL Linea Led

Linea Led Series / Linea Led Series



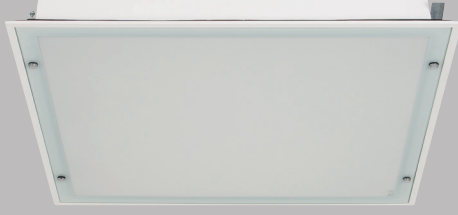

STERIL is designed for hospitals and outdoor spaces. IP65 protection rating with tempered opal glass in front. Can be easily mounted to suspended ceilings with visible T-bars and false ceiling systems.

SMD board technology inside this range designed to maximize the efficiency and homogeneity of the light output.

STERIL başta hastane projelerinde olmak üzere, dış ortam koşullarında kullanıma uygundur. T-Profil tavanlara ve alçıpan tavan sistemlerine kolayca uygulanabilir.

Armatür içerisine uygulanan SMD Led teknolojisi hem maksimum verimlilik hem de mükemmel homojenliğe sahip görsel konfor sağlamak için tasarlanmıştır.



* Code example / Kod örneği:

102.LL.19870 . 030 . 830 . 01 . V1
1 2 3 4 5

- 1- Product code / Armatür kodu
- 2- Power / Güç
- 3- CRI / Kelvin
- 4- Colour / Ürün renk
- 5- Ceiling Type / Tavan tipi
- 6- Control type / Kontrol tipi




4 / Product Color / Ürün Renk




Gypsum Ceiling

Alçı Tavan



Modular Ceiling

Taşıyıcı Asma Tavan



Beam Angle / Işık Açısı



Product Data / Armatür Data	
Item No / Ürün Kod	102.LL.19870.030.830.01.V1
Family Name / Aile Adı	Steril
Material / Malzeme	DKP Metal / DKP Sac
Form / Biçim	Square / Kare
Size / Ölçü	595x595mm
Height / Yükseklik	81mm
Efficiency / Verimlilik	>122lm/W
CRI	80
Light Distribution / Işık Dağılımı	Symmetric Wide Flood / Simetrik Geniş Açılı
Protection Rating / Koruma Sınıfı	65
Lifetime / Armatür Ömrü	L70 / B50 50000 h
Optic / Optik	Tempered Opal Glass / Tamperli Opal Cam

Steril / I02.LL.19870

Lenght / Uzunluk (A)	CRI	Order Code / Sipariş Kodu	Kelvin	30W 250mA lm
595x595mm	CRI>80	I02.LL.19870 . (...) . (...) . (...) . (...)	2700K	3475
			3000K	3550
			3500K	3620
			4000K	3694
			5000K	3800
595x595mm	CRI>90	I02.LL.19870 . (...) . (...) . (...) . (...)	2700K	3225
			3000K	3290
			3500K	3355
			4000K	3420


2 Lenght / Uzunluk (A)	3 Watt - Driving Current / Watt - Sürüş Akımı	4 CRI / Kelvin		5 Product Color / Ürün Renk	
		827 CRI>80 - 2700K	927 CRI>90 - 2700K	01 white	
595x595mm	30W 30W (Direct) - 250mA	830 CRI>80 - 3000K	930 CRI>90 - 3000K	02 ral 9010	
		835 CRI>80 - 3500K	935 CRI>90 - 3500K	03 black	
		840 CRI>80 - 4000K	940 CRI>90 - 4000K	04 gray	
		850 CRI>80 - 5000K		05 dark gray	
				06 special color	

(...)/ Complete Code / Komple Kod


5- Modular Ceiling / Taşyünü Asma Tavan



Ordering Code : I02.LL.19870.V1




Product Technical Drawing / Ürün Teknik Çizimi

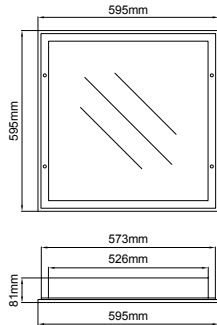

5- Gypsum Ceiling / Alçı Tavan



Ordering Code : I02.LL.19870.V2



Product Technical Drawing / Ürün Teknik Çizimi

